

CR-P2

Lithium Manganese
Dioxide(Li-MnO₂)Batteries


Specifications

Nominal Voltage	6.0V
Nominal Capacity ^{*1}	1400mAh
Standard Discharge Current	5mA
Operating Temperature ^{*2}	-40~+85°C
Approx. Weight	42.0g
UL Component Recognition	MH28717



*1 Nominal capacity is determined at an end voltage of 4.0V when the battery is allowed to discharge at a standard current level at 20±3°C.

*2 Consult EVE when using batteries at temperatures exceeding the -20°C To +40°C range.

Dimensions (mm)

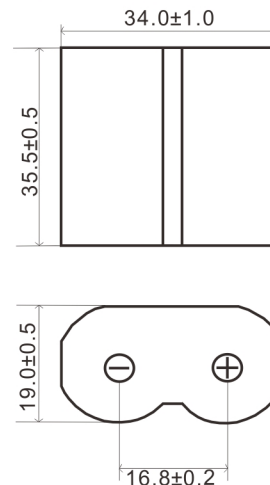

Performance

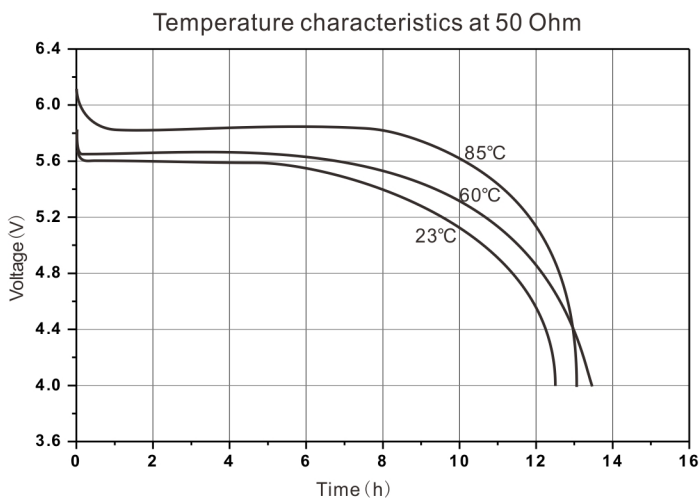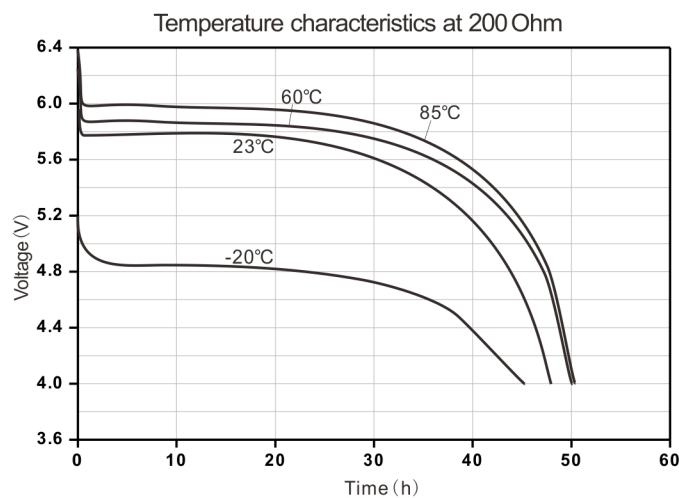

■ Cell and battery designs/specifications are subject to modification without notice, contact EVE for the latest information.

■ Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.

EVE ENERGY CO., LTD.

Address.: EVE Industrial Park, XiKeng Industrial zone, Huihuan Town, Huizhou, Guangdong, China

Operator: (86-752)260 6966 Direct: (86-752)260 5822

Fax: (86-752)260 6033 P.C. 516006