ENERGY VERY ENDURE

CR17335

Lithium Manganese Dioxide(Li-MnO_2)Batteries

Specifications

Nominal Voltage	3V
Nominal Capacity*1	1500mAh
Max. Discharge Current	700mA
Max. Pulse Current*2	2000mA
Standard Discharge Current	5mA
Operating Temperature*3	-40~+85℃
Approx. Weight	17.0g
UL Component Recognition	MH28717

*1 *Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at 20±3℃.*

*2 *Current value for obtaining 2.0V cell voltage when pulse is applied for 15s on and 27s off at 50% discharge depth (50% of the nominal capacity) at +23℃.*

*3 *Consult EVE when using batteries at temperatures exceeding the -20℃ To +40℃ range.*

Dimensions (mm)

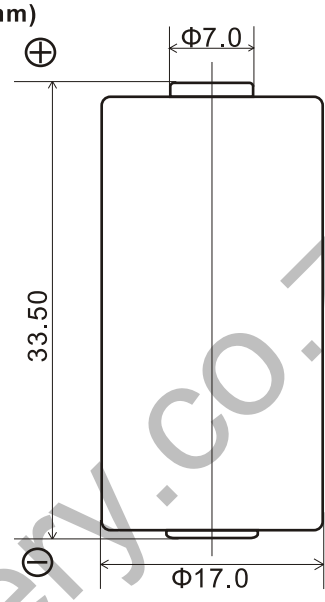

Performance

Temperature characteristics at 28ohm

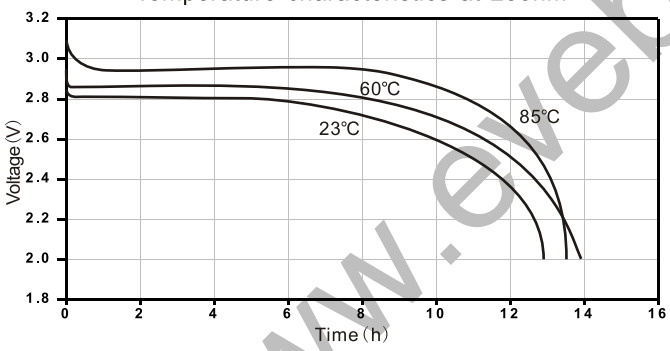

Temperature characteristics at 100ohm

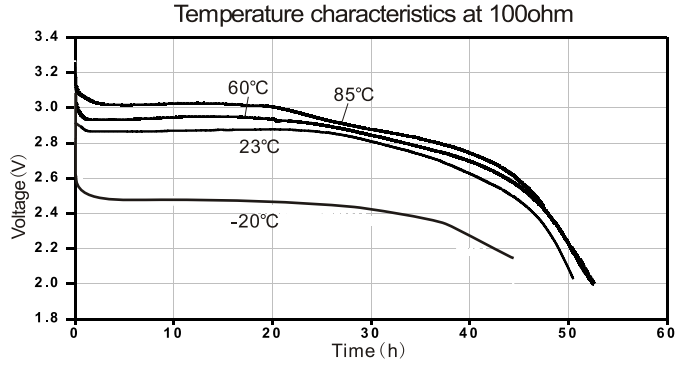

Pulse Discharge Characteristics

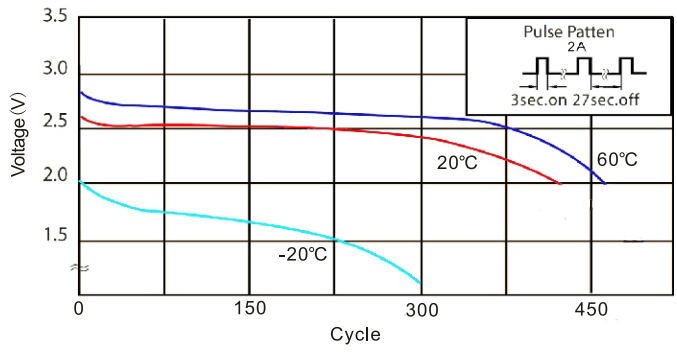

■ *Cell and battery designs/specifications are subject to modification without notice, contact EVE for the latest information.*

■ *Any representations in this data sheet concerning performance are for informational purpose only and are not construed as warranties, either expressed or implied, of future performance.*

www.evebattery.co.za