





CR15270(CR2)

Lithium Manganese
Dioxide(Li-MnO₂)Batteries

Dimensions(mm)



Nominal capacity (10mA, 2.0V off)	850mAh
Nominal voltage	3.0V
Max. constant current	800mA
Max. pulse current	1500mA
Operating temperature	-40~70℃
Weight	11.0g

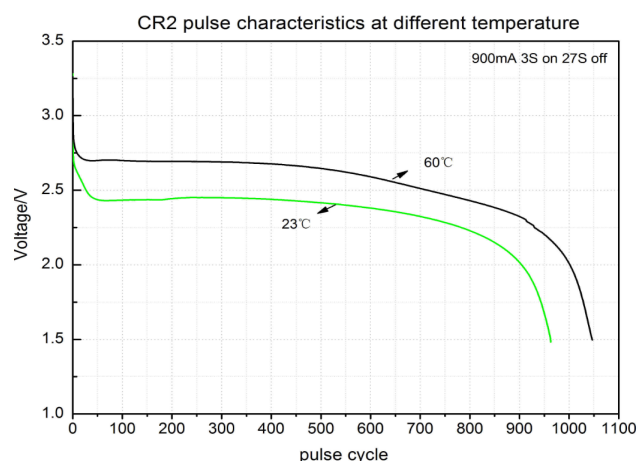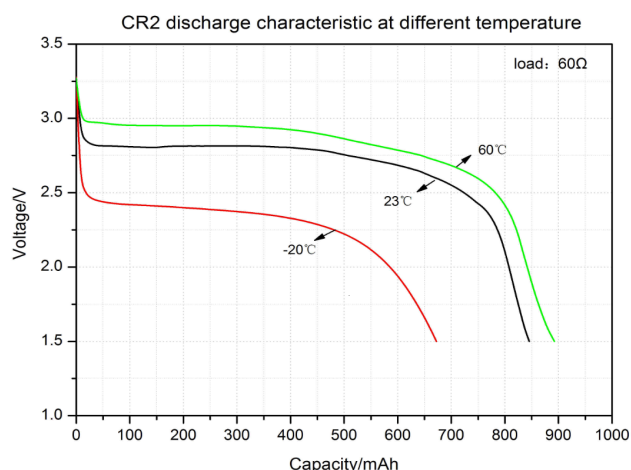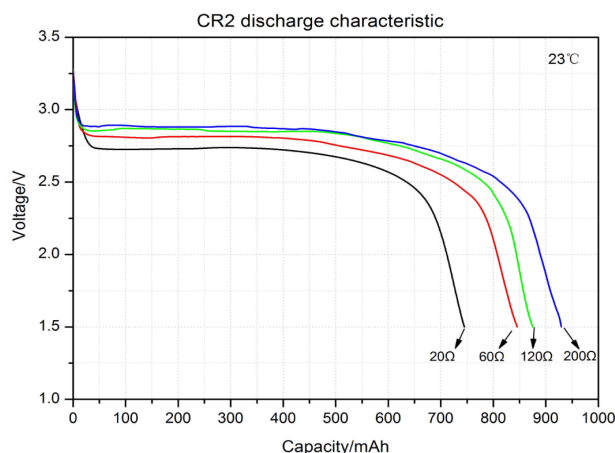

WARNING

- Do not short-circuit between "+" and "-" terminals.
- Do not charge, damage the battery or throw it into fire.
- Do not solder directly on the battery. Please use wire or nickel sheet by spot welding.
- Take out the battery when discharged to cut-off voltage, and dispose of according to the national and local laws.